

10 / 522844

28 JAN 2005

PCT/GB 2003 / 0 0 3 3 7 3



INVESTOR IN PEOPLE

**PRIORITY DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)

The Patent Office  
Concept House  
Cardiff Road  
Newport

South Wales

NP10 8YQ

16 SEP 2003

WIPO


PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

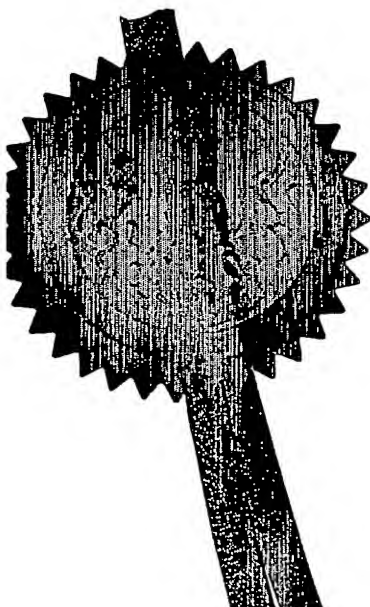

*P. Mahoney*

Signed

Dated 5 September 2003

An Executive Agency of the Department of Trade and Industry

**BEST AVAILABLE COPY**

# The Patent Office

05AUG02 E738285-1 D01038  
P01/7700 0.00-0218024.8

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference	P104150GB/ISH/EC / 48174		
2. Patent application number (The Patent Office will fill in this part)	0218024.8		02 AUG 2002
3. Full name, address and postcode of the or of each applicant (underline all surnames)	Viking Fish Farms Limited Carlton House Old Great North Road Carlton-on-Trent Newark Nottinghamshire NG23 6NL / United Kingdom  Patents ADP number (if you know it) 8438905 001  If the applicant is a corporate body, give the country/state of its incorporation United Kingdom		
4. Title of the invention	A System for Rearing Fish		
5. Name of your agent (if you have one) "Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)	WITHERS & ROGERS Goldings House 2 Hays Lane London SE1 2HW  Patents ADP number (if you know it) 1776001 ✓		
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day / month / year)
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day / month / year)	
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (answer 'Yes' if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d))			
YES			

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 5

Claim(s)

Abstract

Drawing(s) 3 + 3 *pk*

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

*William Rogen*  
Signature

Date 1 August 2002

12. Name and daytime telephone number of person to contact in the United Kingdom.

I S Harrison

0117 925 3030

**Warning**

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least six weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

**Notes**

- a) *If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500 505.*
- b) *Write your answers in capital letters using black ink or you may type them.*
- c) *If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- d) *If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- e) *Once you have filled in the form you must remember to sign and date it.*
- f) *For details of the fee and ways to pay please contact the Patent Office.*

## A System for Rearing Fish

This invention relates to a system for rearing fish, in particular to the farming of sea fish such as salmon and cod.

The present system for farming sea fish is based on a "suspended cage" type system in which a reticulated, typically netting, enclosure is suspended from floats located offshore, whereby the fish to be farmed are contained but are subject to ambient sea-water properties and conditions. However, the system is normally operated in deep water and requires an extensive network of jetties or pontoons as well as boats to access the system, with attendant risks to operators especially in bad weather. There is also a build-up of waste products and food on the sea bed beneath the cage which in turn results in contamination of the marine environment, exacerbated by chemicals required to treat, for example by delousing, the growing fish. Quite often, stock fish escape through torn netting and wild fish and predators gain entry into the cage zone where the fish are being reared. This can lead to crossbreeding and transference of diseases as well as further losses of stock.

The traditional fish farming systems, including the anchor cables for the floats, are a danger to shipping, and efficient operation of the systems can be compromised by the weather. Both capital and operational costs of suspended cage type systems can be very high. For example, the cages require frequent maintenance because the nets become blocked with jelly fish and seaweed. When weather conditions prohibit operators from clearing the nets, a build-up of fish waste and ammonia results, thereby contaminating the cage itself and the surrounding area and producing methane gas below the cage. Contamination of the local marine environment from the various sources is believed to be instrumental in causing a decline in the population of other fish and marine species.

An object of the invention is to provide a marina fish farming system which avoids the problems of conventional systems.

In one aspect, the present invention provides an onshore fish farming system comprising a holding tank, means for intake of sea-water to the holding tank and means for discharge of water from the holding tank to generate a flow of water through the tank, in which the discharge means comprises means for collection of waste material from the bottom of the tank and removing said waste material entrained in the discharge water.

Preferably, the tank is formed with at least one sloping wall to define a generally V-shaped cross section, whereby waste material accumulates under gravity at the bottom of the tank in a concentration locally higher than elsewhere in the tank, and the discharge means has a collection or incident conduit including apertures to allow waste material access to the conduit with the water drawn into the conduit for passage through the discharge means. The flowrate through the conduit is preferably enhanced by a pump means which may, for example, comprise a syphon pump or, alternatively or additionally, an electrically-powered pump. Passage of waste material-loaded water through the conduit may be facilitated by mechanical means such as a screw conveyor or a ribbed or otherwise-segmented flat belt conveyor.

The intake means comprises a pump which preferably includes an upstream strainer means to remove any wild fish, molluses, crustaceans, seaweed and other macro extraneous material entrained in the intake water.

The pump is preferably submersibly-mounted and the intake should preferably be located at least one metre below the lowest level of the sea at low water. The intake water is preferably passed from a rising main through a header tank provided with filter means to remove smaller-scale extraneous material, such as particles of sand, mussel spat and the like, and sterilisation means to kill any living matter such as microorganisms before being passed to the holding tank. The filter means may comprise a simple strainer element for light-duty requirements or for example a mechanical drum-type filter for heavier-duty requirements. A standby pump is preferably provided to augment the flowrate as required by operational criteria or to be used in the event of a fault in the main pump. The standby pump is preferably connected to the same rising main to the header tank. The standby pump may also be used to increase overall water flow on a short term basis to enhance the rate of removal waste material from the holding tank through the discharge of means. Intake water from the header tank to the holding tank is preferably passed through one or more air-entraining venturi, in order to increase the level of oxygen in the water. Additionally or alternatively, oxygenation of intake water may be provided by direct diffusion of gaseous oxygen into the holding tank or by employing a separate pumping system to entrain air into the intake water. A small submerged pump may be provided below the intake water pipe, or the pipe may have an extension to the lower-part of the tank, to increase local turbulence as a measure to prevent flow stagnation.

In order to ensure that fish stocks are maintained in optimum condition, the salinity of the water in the holding tank may be adjusted by addition of fresh water to the tank, preferably

via the rising main upstream of the sterilisation means and the filter means. The ability to mix fresh and salt water reduces the incidence or effect of parasitic lice.

The discharge means preferably comprises separation means for removal of solid waste material, whereby water returned to the sea is relatively unpolluted. The separation means may comprise a weir separator or a drum filter, by way of example. Conveniently, the separation means includes two or more independently-operable parts or chambers with means selectively to deliver waste water from the holding tank thereto, whereby one chamber or part remains in service while the other is being cleaned. The waste products recovered may be dried and used as fertiliser.

In the fish farming system according to the invention, the holding tank is preferably disposed with its major or longitudinal axis essentially parallel with the local shoreline, the intake water being abstracted relatively upstream and the discharge water being returned relatively downstream with respect to the or any ambient current along the shore.

The holding tank may be excavated behind the high-water mark of the shore or may at least partially be formed from prefabricated components such as ribbed panels; the tank is preferably lined with a flexible, tear-resistant liner. An excavated lagoon-type tank is preferably stabilised with a sprayed-on coating, for example of a fibrous cement mix, before application of the liner. The tank may be landscaped to minimise visual impact. For servicing purposes, a peripheral walkway may be provided and, optionally, hoppers for holding fish food, automated feeder discharge units and the like may be disposed at convenient locations around the periphery of the tank.

An electrical control panel connected to the pumps, any lighting installations and any other electrical components may be provided at a convenient location. Underwater lighting may be provided to address the reduction of grilse conversion.

Embodiments of the invention will now be described by way of example with reference to the accompanying drawings, of which:

Figure 1 is a schematic plan view of a fish farming installation according to the invention;

Figure 2 is a frontal elevation of the system of Figure 1;

Figure 3 is a sectional view of the installation from the waste tank end;

Figure 4 is a sectional view from the intake end; and

Figure 5 is a schematic view showing the water supply and power supply circuits of the installation.

Referring firstly to Figure 1, the holding tank 11 is shown disposed parallel with the shore line 12, the current direction flowing from right to left as shown and with intake water taken from relatively upstream and discharge water being returned relatively downstream. Intake water from the sea is pumped by a submersible pump 13 (see Figure 4) through a rising main 14 to a header tank 15 with filtration provision and fresh water intake for mixing and make-up purposes. Ultra-violet steriliser units 16 (see Figures 2 and 5) are mounted to one side of the header tank, either in a vertical or horizontal array, in order to kill unwanted microorganisms in the intake water. An auxiliary or standby pump 17 (Figure 5) also feeds into the rising main. The header tank 15 has an outlet pipe 18 to the holding tank, an overflow pipe 19 which also feeds to the holding tank and a skimmer trap and level limit 20.

The holding tank 11 is formed in a partially excavated depression formed in the shore, whereby the sloping rear wall 21 is constituted by the excavated banking and the vertical front wall 26, landscaped and ballasted by rocks and fines 27, is formed by prefabricated rib elements 28, sealed and bolted together along edge flanges, the walls of the tank being lined with a flexible liner material. Although not shown in the drawings, a peripheral walkway is provided around the edge or lip of the holding tank for servicing and fish-feeding purposes.

A perforated, for example slotted, waste collection pipe 29 is disposed longitudinally of the holding tank towards the bottom thereof and, at the discharge end of the tank, is formed with a rising portion 30 which feeds waste water into settlement tanks 31 by means of a syphon effect. The horizontal part of the pipe 29 contains a screw of auger mechanism rotatably connected to a drive motor 32 via a gearbox. The motor 32 may be serviced via an inspection chamber 33 which contains, at the bottom thereof, a float-switched submersible pump 34 to enable the inspection chamber to be emptied of water for servicing purposes. The settling tanks 31, arranged in a double row for alternately cleaning and use, have an overflow pipe 35 feeding back to the holding tank and a common outlet pipe 36 for returning used water to the sea.

As shown in the drawings, the holding tank is arranged to be substantially between mean low and high water marks for minimal environmental impact.

With particular reference to Figure 5, it is seen how incoming water, having been suitably sterilised and strained, is passed through the holding tank on an open loop basis to create therein a simulated current, the outlet water being drawn through the perforated pipe 29 with solid waste matter entrained therein for return to the sea via the waste collection and settlement tanks 31. Electricity feed supplies are connected to the ultra-violet sterilisers, to the main and auxiliary feed pumps and to the inspection chamber pump.

Using the system according to the invention, fish may be efficiently farmed without creating any dangers to passing shipping and without problems for operatives associated with adverse weather conditions. The system requires reduced operational maintenance time and is therefore more economically efficient than conventional systems and, additionally, allows effective control over the quality both of the inlet and discharge water with less environmental harm being created and a lower incidence of disease in the farmed fish.



1/3

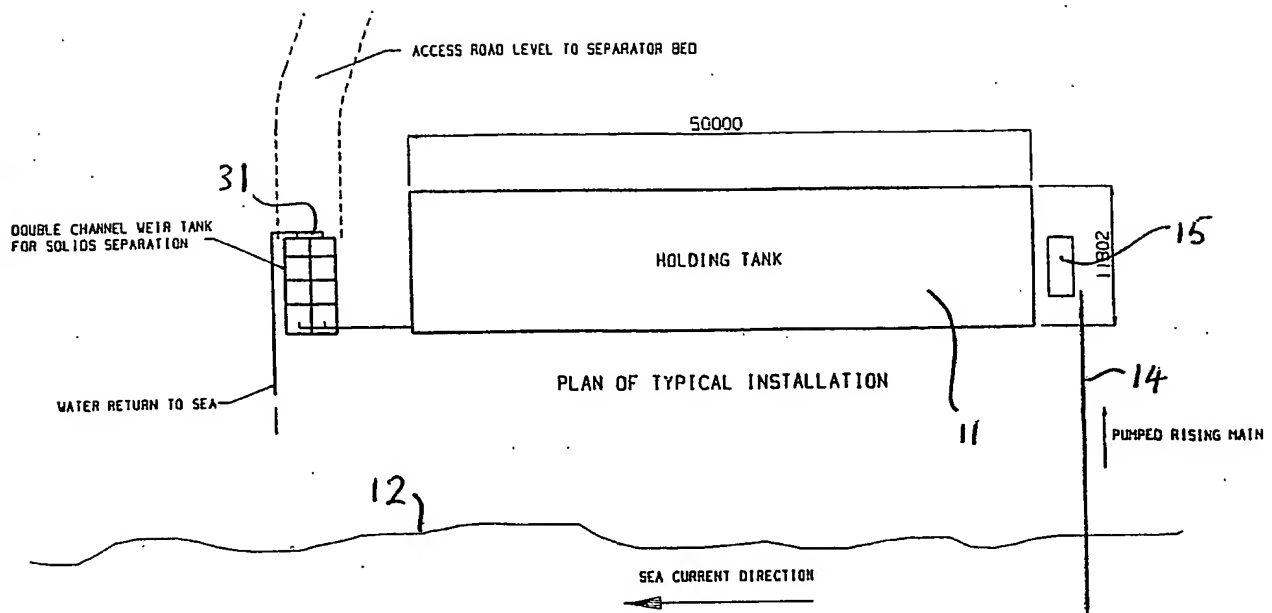


FIG. 1

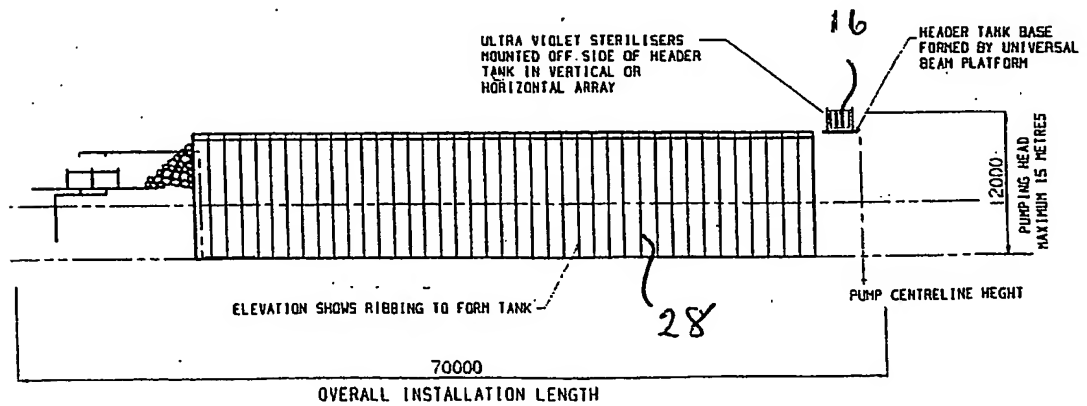


FIG. 2

2/3

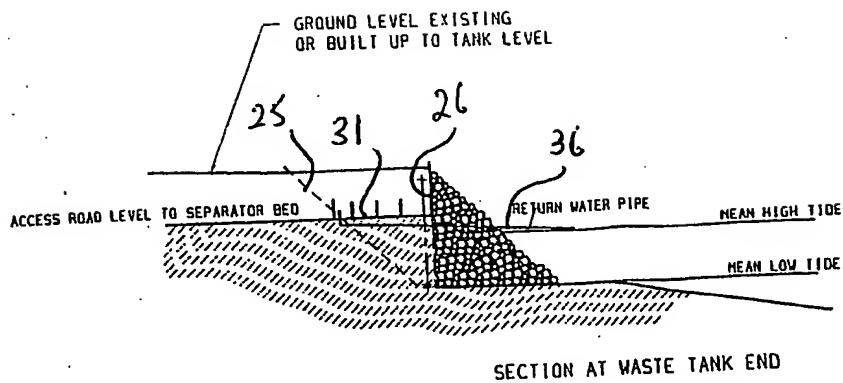


FIG. 3

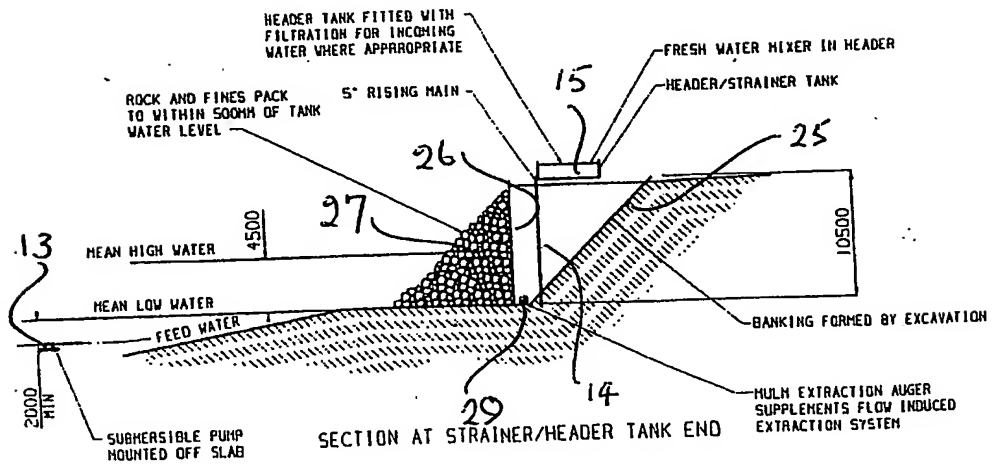


FIG. 4

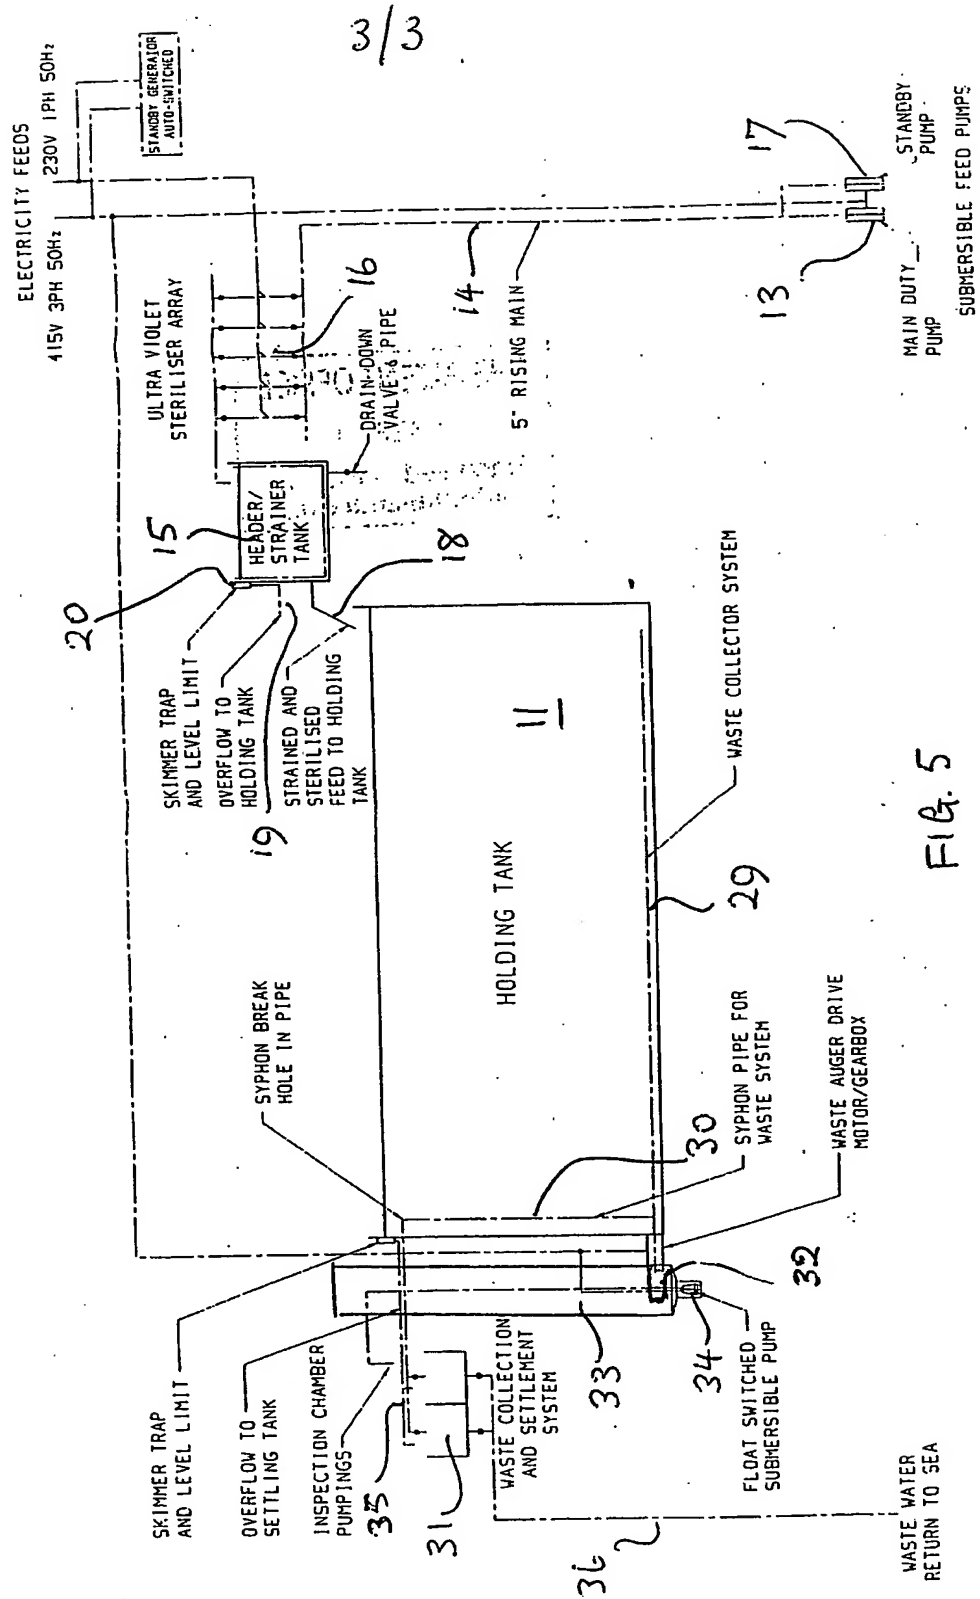


FIG. 5

THE PATENT OFFICE  
08 SEP 2003  
Received in Patents  
International Unit



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**